

# MA4.8Q

High power amplifier

electronics

## features


- ▶ Uncompromised sound quality
- ▶ Integrated CAT-5 based monitoring and control system
- ▶ Patented Class TD Topology
- ▶ Regulated Switch Mode PSU
- ▶ Voltage and Current Limiters
- ▶ Over-Temperature and Fuse Protection
- ▶ Four Discrete Channels

## applications

- ▶ Churches
- ▶ Theatres
- ▶ Clubs
- ▶ Theme Parks
- ▶ Arenas
- ▶ Stadiums

Housed in a convenient 2U package, the MA4.8Q 4-channel amplifier allows for the adjustment of maximum voltage peak, gain adjustment and has on-board network capability for monitoring and control. With these features it is now possible to specify identical amplifiers in an installation and then adjust each output to the very specific requirements of the speaker system. A typical large-scale system is a combination of high-powered speakers, full range in-fill speakers, 70/100V ceiling speakers, with an active speaker management system. With switchable outputs and on-board network capabilities, the MA4.8Q can be designed into a complete value engineered system handling all amplification tasks.

## overall dimensions

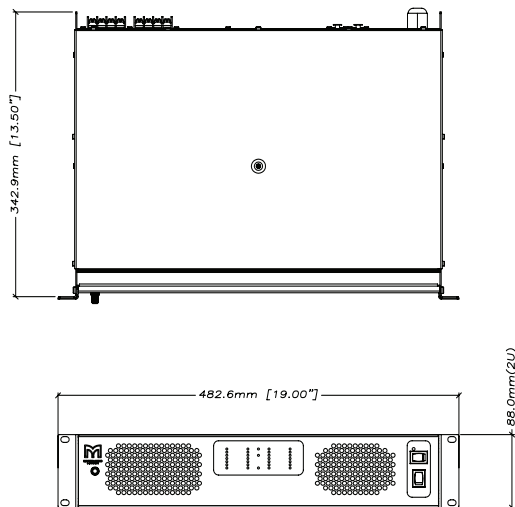

MA4.8Q



## technical specifications

<b>MAX OUTPUT POWER</b>	Four Channels
16Ω PER CHANNEL	625 W
8Ω PER CHANNEL	1000 W
4Ω PER CHANNEL	1200 W
Hi-Z: 70/100V	900 W
<b>MAX OUTPUT VOLTAGE</b>	
PER CHANNEL	100 Vrms
<b>DISTORTION</b>	
THD 20Hz – 20kHz FOR 1W	0.1%
THD AT 1kHz AND –1dB BELOW CLIP	0.05%
SIGNAL TO NOISE RATIO	112dB
<b>CHANNEL SEPARATION @ 1kHz</b>	70dB
<b>FREQUENCY RESPONSE +0/-3dB</b>	6.8Hz – 34kHz
<b>INPUTS</b>	
GAIN SELECTABLE (dB)	23, 26, 29, 32, 35, 38, 41, 44
DEFAULT GAIN	35dB
<b>FRONT PANEL</b>	
<b>GAIN CONTROLS</b>	21 position detent
<b>INDICATORS: (common)</b>	
NomadLink® Network connected	Blue LED
Power Average Limiter	Red LED
Power On	Green LED
Option Card (on)	Yellow LED
<b>FRONT PANEL INDICATORS: (per channel)</b>	
Signal present / Hi impedance warning	Green/Red LED
-10dB and -4dB output signal present	2 x Green LED
Voltage Peak Limiter (VPL) clipping	Red LED
Current Peak Limiter (CPL) active	Orange LED
Very High Frequency (VHF) warning	Yellow LED
High Temperature warning	Yellow LED
Fault warning	2 x Yellow LED
Mute	2 x Yellow LED
<b>REAR PANEL</b>	
<b>INPUT CONNECTORS</b>	3-pin Phoenix, electronically balanced
<b>OUTPUT CONNECTORS</b>	Barrier strip 2-pole screw terminals
<b>POWER</b>	
OPERATION VOLTAGE	130-265 V / 65-135 V
MINIMUM POWER-UP VOLTAGE 230V / 115V	171V / 85V
POWER AVERAGE LIMITER	Yes
SOFT START / INRUSH CURRENT DRAW	Yes / max 5A
<b>DIMENSIONS</b>	
WIDTH	483mm (19ins)
HEIGHT	88mm (3.5ins) 2U
DEPTH	343mm (13.5ins)
WEIGHT	12kg (26.4lbs)

Century Point, Halifax Road, Cressex Business Park,  
High Wycombe, Buckinghamshire HP12 3SL, England.  
Telephone: +44 (0)1494 535312 Facsimile: +44 (0)1494 438669  
E-mail: info@martin-audio.com  
All information is Copyright © 2006 Martin Audio Ltd.



www.martin-audio.com